



ID1604 Size: 9V (6LF22)

Alkaline-Manganese Dioxide Battery

2	
Š	
5	
5	
Zn	

Professional Alkaline	RIAL DURACELL Battery		17.5 mm 15.5 mm 12.95 mm 12.45 mm
Nominal voltage	9 V		26.5 mm 24.5
Impedance	3,050 m-ohm @ 1 kHz		
Typical weight	45 g (1.6 oz)		46.4 mm
Typical volume	22.8 cm ³ (1.4 in ³)		MAX
Terminals	Miniature snap		48.5 mm 46.5
Storage temperature range	5°C to 30°C (41°F to 86°F)		
Operating temperature range	-20°C to 54°C (-4°F to 130°F)	1	
Designation	IEC: 6LF22	1	Dimensions shown are IEC standards

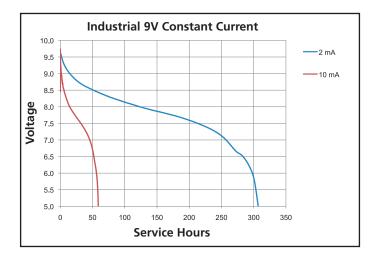

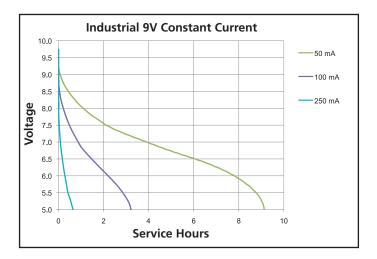




Berkshire Corporate Park Bethel, CT. 06801 U.S.A. Telephone: Toll-free 1-800-544-5454 www.duracell.com


Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.


ID9VINWE0514


ID1604 Size: 9V (6LF22)

Alkaline-Manganese Dioxide Battery

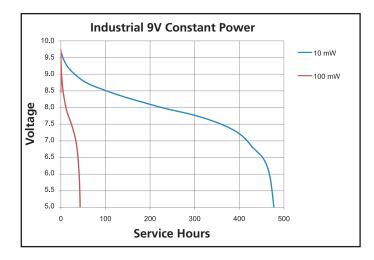

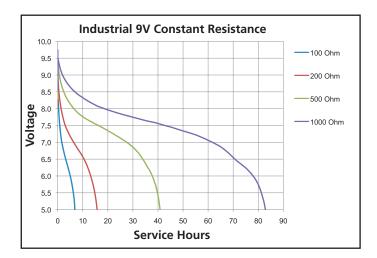

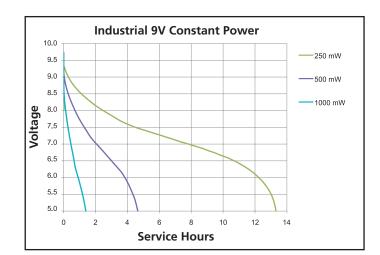

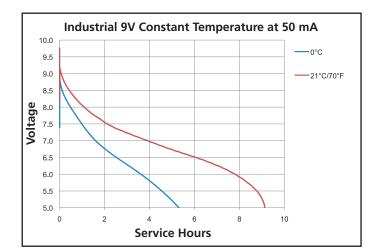



Berkshire Corporate Park Bethel, CT. 06801 U.S.A. Telephone: Toll-free 1-800-544-5454 www.duracell.com Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.

ID9VINWE0514

Zn/MnO₂